

(43) International Publication Date 20 January 2005 (20.01.2005)

(10) International Publication Number WO 2005/006100 A3

(51) International Patent Classification7: 27/08, G05F 3/30, 1/10

H01L 21/02.

(21) International Application Number:

PCT/CA2004/001030

(22) International Filing Date:

14 July 2004 (14.07.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/486,418

14 July 2003 (14.07.2003) US

(71) Applicant (for all designated States except US): MICRO-BRIGE TECHNOLOGIES INC. [CA/CA]; 1980 Sherbrooke Street West, Suite 505, Montreal, Québec H3H 1E8 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FROLOV, Gennadiy [CA/CA]; 2250 Guy Street, Montreal, Québec H3Z 2M3 (CA). LANDSBERGER, Leslie M. [CA/CA]; 310

Elm Avenue, Montreal, Québec H3Z 1Z5 (CA). GRUDIN. Oleg [UA/CA]; Apt. 2404, 1411 du Fort Street, Montreal, Québec H3H 2N7 (CA).


(74) Agent: OGILVY RENAULT; Suite 1600, 1981 McGill College Avenue, Montreal, 10 H3A 2Y3 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD. MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW. GH. GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ADJUSTING ANALOG ELECTRIC CIRCUIT OUTPUTS

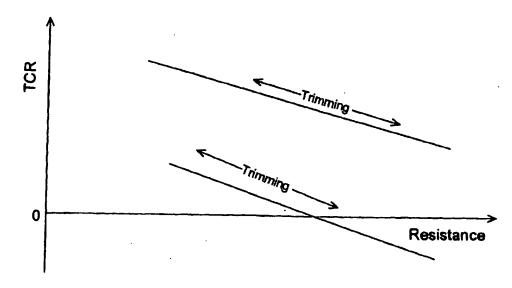

(57) Abstract: Electro-thermal trimming of thermally-trimmable resistors is used to trim one or more of the plurality of resistors in or associated with an analog electric circuit. The TCR of each of a subset of a plurality of electro-thermally-trimmable resistors can be trimmed independently from the resistance in order to adjust the output parameter of an analog electric circuit without changing other parameters that would be affected by a change in resistance.

2005/006100 A3